



Optimization of Coagulation-Flocculation Process of Landfill Leachate by Tin (IV) Chloride Using Response Surface Methodology

Abdul Aziz Hamidi ^{1,2*}, Syed Zainal Sharifah Farah Fariza¹, Alazaiza Motasem Y.D.³

¹School of Civil Engineering, Engineering Campus, Universiti Sains Malaysia, 14300 Nibong Tebal, Penang, Malaysia

²Solid Waste Management Cluster, Science and Technology Research Centre, Engineering Campus, Universiti Sains Malaysia, 14300 Nibong Tebal, Penang, Malaysia

³Department of Civil Engineering, College of Engineering (COE), ASHarqiyah University (ASU), 400 Ibra, Oman

*Correspondence to

Hamidi Abdul Aziz, Tel:
+ 60-45996215, Fax:
+60-45996906, E-mail:
cehamidi@usm.my

Published online June 30
2019



Abstract

Landfill leachate is highly polluted and generated as a result of water infiltration through solid waste produced domestically and industrially. This study investigated the applicability of the response surface methodology (RSM) to optimize the removal performances of chemical oxygen demand (COD), color, and suspended solids (SS) from landfill leachate by coagulation process using Tin tetrachloride pentahydrate. The leachate samples were collected from Alor Pongsu Landfill (APLS) in Perak, Malaysia. Before starting the experiments, general characterization was carried out for raw leachate samples to investigate their physical and chemical properties. The effects of the dosage and pH of SnCl₄ on the removal performances were evaluated as well. An ideal experimental design was performed based on the central composite design (CCD) by RSM. In addition, this RSM was used to evaluate the effects of process variables and their interaction toward the attainment of their optimum conditions. The statistical design of the experiments and data analysis was resolved using the Design-Expert software. Further, the range of coagulant dosage and pH was selected based on a batch study which was conducted at 13 000 mg/L to 17 000 mg/L of SnCl₄ and pH ranged from 6 to 10. The results showed that the optimum pH and dosage of SnCl₄ were 7.17 and 15 g/L, respectively, where the maximum removal efficiency was 67.7% for COD and 100% for color and SS. The results were in agreement with the experimental data with a maximum removal efficiency of 67.84 %, 98.6 %, and 99.3%, for COD, color, and SS, respectively. Overall, this study verified that the RSM method was viable for optimizing the operational condition of the coagulation-flocculation process.

Keywords: Landfill, Leachate, Tin tetrachloride, Coagulation, Flocculation, RSM

Received May 12, 2019; Revised May 23, 2019; Accepted June 1, 2019

1. Introduction

Sanitary landfill is the common method for solid waste disposal in most developing countries due to its simple operation and cheap cost compared to the other methods (1). There are more than 230 landfills in Malaysia and quite a number are just dumpsites with minimum environmental protection (2). The old dumpsites still emit landfill leachate, which is stable and difficult to be further degraded biologically. Leachate is defined as the liquid generated when water percolates through solid waste and includes dissolved or suspended materials from different disposed materials. It often contains high-strength wastewater with high pH, chemical oxygen demand (COD), biochemical oxygen demand (BOD), inorganic salts, and toxicity. Leachate characteristics play significant

roles in determining suitable leachate treatment methods due to its constituents that may change with time. Biological processes are appropriate to young leachate compared to older or stabilized leachate due to its high molecular weight organics and consist of low COD (3). Hence, the coagulation-flocculation process is one of the frequently applied techniques for stabilized or old leachate.

In addition, the purification of aqueous colloidal pollutants is achievable by coagulation-flocculation techniques. In the coagulation process, the destabilization of colloidal suspensions occurs by neutralizing electric forces amidst suspended particles while flocculation gains the particles bridging each other and encourages forming flocs or larger aggregates (4). The efficiency of the

coagulation and flocculation process consists of the type and dosage of coagulant and flocculants, pH, mixing speed and time, as well as temperature and retention time (5). The proper combination of these factors is advantageous for obtaining high efficiency of treatment. The coagulation-flocculation process is widely applied in water and wastewater treatments. However, it involves a time-consuming process with a try and error approach where optimum conditions are determined at different experimental conditions such as the effect on pH, dosages, mixing speed, and the like (6,7). As an alternative to this conventional method, the response surface methodology (RSM) technique was applied in the design of an experiment which allows a restricted number of experiments, hence reducing the time for conducting the experiments. RSM is a tool for identifying the influences of factors and their responsive operation (8). This tool involves a statistical, mathematical technique which indicates the empirical design (9-12). Therefore, it is important to choose an experimental design that suits an appropriate mathematical function for evaluating the quality of the model and predicting its accuracy in relation to the obtained experimental data.

Inorganic coagulants such as aluminum (alum) sulfate, ferrous sulfate, ferric chloride, polyaluminium chloride, and ferric chloro-sulfate are usually used in the coagulation-flocculation process (13-17). Most of these coagulants consist of the trivalent state of coagulant. Generally, the effectiveness of charge neutralization is greater when the cation charge is greater. To improve the treatment of water and wastewater, several studies were conducted to find the potential of four valence state chemicals. For instance, Aziz et al (18) applied titanium tetrachloride (TiCl_4) as a coagulant to treat semi-aerobic leachate and Hussain et al (19) used Zirconium (IV) chloride as a coagulant to treat the surface water.

Tin tetrachloride (SnCl_4) is one of the inorganic tin compounds, which is also a part of Lewis acid. This acid is a compound or ionic species such as H^+ that can accept an electron pair from a donor compound. Since Lewis acid is able to accept an electron, it was studied and used as a coagulant in the treatment. Some Lewis acids are TiCl_4 , ferric chloride, aluminum chloride, zinc chloride, and SnCl_4 .

Recently, many of these compounds have been used as a coagulant for the coagulation-flocculation process. Pushpalatha and Lokeshappa (20) utilized TiCl_4 as a coagulant to treat semi-aerobic leachate. In addition, Galloux et al (21) used polytitanium tetrachloride for coal-mining wastewater treatment and concluded that the effectiveness of charge neutralization is parallel to the charge of the cation. In other words, the greater the cation charge, the greater is the effectiveness of charge neutralization.

For example, the relative effectiveness of monovalent (Na^+), divalent (Ca^{2+}), and trivalent (Al^{3+}) ions is 1:60:700, respectively. It shows that the trivalent of aluminum ions is 700 times more effective regarding charge neutralization compared to monovalent ion (22).

Considering the above-mentioned discussions, this paper aimed to study the applicability of RSM to investigate the potential use of SnCl_4 as a coagulant for treating landfill leachate. Further, the RSM was applied to determine the optimum operational condition in terms of dosage and pH on the removal of COD, color, and suspended solids (SS).

2. Materials and Methods

2.1. Leachate Sampling

Alor Pongsu Landfill (APLS) or Beriah Landfill in Perak was constructed as open dumping, which started its operation since 2000.

As shown in Figure 1, it is located at $5^{\circ}05'14.20''$ N and $100^{\circ}36'10.53''$ E and approximately covers an area of 8 acres within palm oil plantation. Furthermore, the site is positioned on an area of alluvium deposits which consist of silt, clay, sand, and gravel (23,24). Moreover, it receives an average of 660000 metric tons of domestic solid waste per year which represents the daily average of 200 metric tons. The climate of this region is classified as a typical Malaysian Peninsula (equatorial) with a uniform daily temperature of a minimum and maximum of 30°C - 40°C and high humidity of 80%-90%. This area also receives a high average rainfall of about 1800 mm (1).

Raw landfill leachate samples from APLS were collected at leachate detention pond by using 10 L and 20 L HDPE bottles. Monthly sampling was conducted between April 2016 and October 2018.



Figure 1. Alor Pongsu Landfill Site.

Source: Google Map (2016) and Majlis Daerah Kerian, Perak, Malaysia.

Table 1. The Raw Leachate Characteristics

Parameter	Unit	Discharge Limit for Leachate ^a	Minimum	Maximum	Average ^b
pH	-	6.0-9.0	7.52	8.15	7.84
Temperature	°C	40.00	26.67	31.72	29.20
Turbidity	NTU	-	228.75	337.50	306.25
SS	mg/L	50	591.67	866.67	745.00
Color	Pt Co.	100	16,389	23,020	19,705
COD	mg/L	400	3,080	5,323	4,202
BOD ₅	mg/L	20	28	236	132
BOD ₅ /COD	-	-	0.01	0.07	0.04
NH ₃ -N	mg/L	5	870	1,850	1,360
Conductivity	S/cm	-	13,720	17,717	15,719
DO	mg/L	-	0.04	1.10	0.57
TDS	mg/L	-	4,855	8,110	6,483

Abbreviations: SS, suspended solids; COD, chemical oxygen demand; BOD, biochemical oxygen demand; DO, dissolved oxygen; TDS, total dissolved solids.

^a Permissible condition for the discharge of leachate by Environmental Quality (Control of Pollution from Solid Waste Transfer Station and Landfill) Regulations, 2009 (PU(A) 433) Regulation 13; ^b Average value for nine samples taken from April 2016 to October 2018.

The samples were then kept in cold storage at 4°C in accordance with the *Standard Methods for the Examination of Water and Wastewater* (25). Before each experiment, the samples were conditioned at ambient temperature for about two hours before the jar test. The in-situ parameters were also taken using a YSI 556 multi-probe by dipping the instrument into the leachate pond. The characteristics of raw leachate are provided in Table 1.

The landfill can be considered as anaerobic landfill leachate with COD, BOD₅, color, SS, and NH₃-N exceeded the permissible discharge limits of leachate effluent in accordance with the Environmental Quality Regulation (2009). The BOD₅/COD of 0.04 (<0.1) ratio indicates that the leachate is old and stabilized since the landfill has been in operation for more than 10 years (26). The leachate is dark in the color intensity of 19,705 Pt-Co and is slightly alkaline (pH =8). The presence of humic substances mainly contributes to the dark color. As the leachate is stable, a lower concentration of volatile fatty acids is expected which increases the pH (1,26).

The coagulation-flocculation process was performed using standard jar test equipment (VELP-Scientific, Model JLT6, Italy). The applied coagulant was tin tetrachloride pentahydrate (SnCl₄·5H₂O) in granular form and was prepared as a stock solution before the experiment. The pH of the leachate samples was adjusted by using 3M HCL and 3M NaOH. Six beakers with 1L volume were filled with 500 mL of leachate and later, a pre-determined concentration of coagulant was added, and finally, examined at a pH of 8. Rapid mixing for all experiments was set at the speed of 250 rpm for 4 minutes (3), followed by a slow mixing speed at 40 rpm for 30 minutes. Then, it was allowed to settle for 30 minutes and the retention time was set at 4 hours.

2.2. Design of Experiment and Analysis

The statistical design of the experiments and data analysis was resolved using the Design-Expert software (version 6.0.6). This software was also used to display the 3D surface and 2D contour of the response surface. In this study, the central composite design (CCD) and RSM were used to optimize and evaluate the correlation between two independent variables including pH and dosage (Table 2). CCD is an experimental design, which is useful in RSM, for building a second-order (quadratic) model for the response variable without needing to use a complete three-level factorial experiment. The range of coagulant dosage and pH was selected based on a batch study which was conducted at 13 000 mg/L to 17 000 mg/L of SnCl₄ and pH ranged from 6 to 10. Moreover, dependent factors included COD, SS, and color removals. The performance of the process was evaluated by using a quadratic model of equation (1). Eventually, the total number of the achieved experiments from these factors was 13 CCD experimental design with 5 replicates at a central point.

$$Y_{1j} = \beta_0 + \sum_{j=1}^k \beta_j X_j + \sum_{j=1}^k \beta_{jj} X_j^2 + \sum_{i < j=2}^k \sum_{i=1}^k \beta_{ij} X_i X_j + e_i,$$

Table 2. Design Summary for Response and Factor

Response	Minimum	Maximum
COD removal	19.86	67.54
Color removal	46.69	99.60
SS removal	49.32	99.40
Factor	Low Actual	High Actual
pH	6	10
Dosage (mg/L)	13000	17000

Abbreviations: COD, chemical oxygen demand; SS, suspended solids.

where Y is the response and X_i and X_j are the variables. Similarly, β denotes the regression coefficient and k represents the number of factors that were studied and optimized in the experiment. Finally, e indicates the random error.

As shown in Table 3, the perceived percent of removal efficiencies differed between 19.86% and 67.54%, 46.69% and 99.60%, as well as 49.32% and 99.40% for COD, color, and SS, respectively.

3. Results and Discussion

Analysis of variance (ANOVA) was applied to achieve the correlation between the process variables and the responses whereas experimental data were used to verify the adequacy of the used model (12,27).

The quality of the fit polynomial model was expressed by the value of the correlation coefficient (R^2) and its statistical significance was checked by the F test in the same program (6). The R-squared value indicated the correlation coefficient for the model while the predicted R-squared was used to determine the accuracy of the model to predict the response values. The ANOVA results are presented in Table 4. The quadratic models were significant at $P < 0.05$. The obtained value for R^2 is 0.9776, 0.9999, and 0.9997 for COD, color, and SS, respectively. An adequate precision (AP) differentiates the range of the predicted values at the design points to the average prediction errors. The AP value for COD is 20.488, followed by 477.580 and 222.377 for color and SS. According to

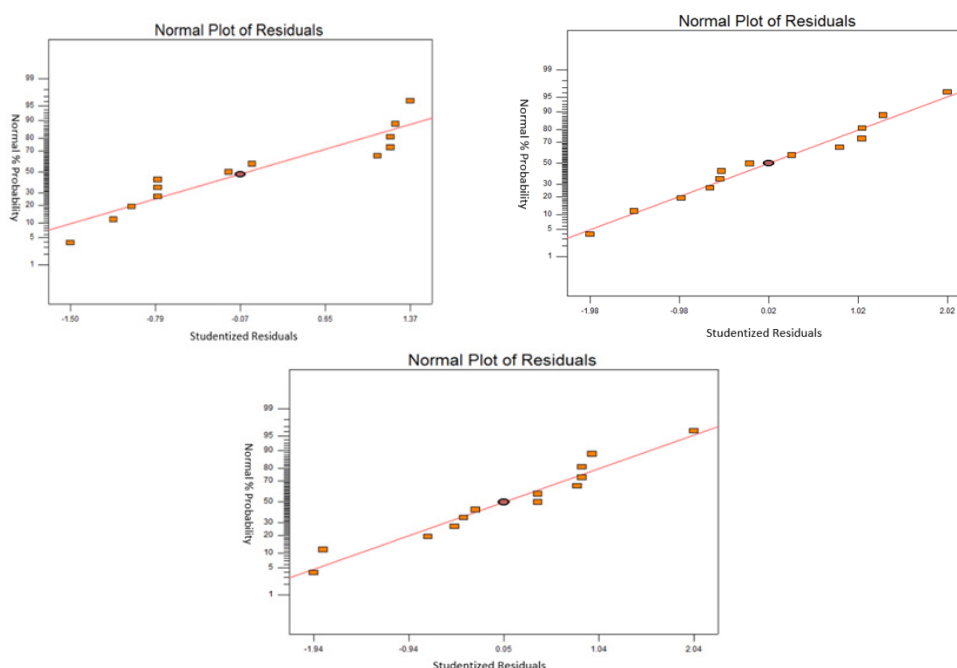


Figure 2. Normal Probability Plot of Standardized Residual for Chemical Oxygen Demand (a), Color (b), and Suspended Solids (c)

Table 3. Factor and Response to the Experimental Condition

Run No.	Factor A pH	Factor B Dosage (mg/L)	Response 1 COD Removal (%)	Response 2 Color Removal (%)	Response 3 SS Removal (%)
1	10.00	13,000	19.86	46.69	49.32
2	8.00	15,000	62.05	97.98	99.15
3	8.00	17,000	60.73	99.35	99.40
4	6.00	15,000	61.13	99.60	97.15
5	6.00	13,000	54.18	96.60	96.44
6	8.00	15,000	67.54	98.00	98.66
7	8.00	15,000	62.05	98.25	99.15
8	8.00	15,000	67.54	98.05	99.01
9	8.00	13,000	59.95	90.98	94.35
10	10.00	15,000	30.06	57.45	55.82
11	6.00	17,000	61.77	97.59	94.65
12	10.00	17,000	32.65	61.98	60.23
13	8.00	15,000	62.05	98.21	99.01

Abbreviations: COD, chemical oxygen demand; SS, suspended solids.

Table 4. ANOVA Results and Quadratic Model for COD, Color, and SS Removals

Response	Source	Sum of Squares	Degree of Freedom	Mean Square	F-value	Prob >F	Remarks
COD removal	Model	2881.53	5	576.31	61.17	<0.0001	SD = 3.07,
	A	1488.69	1	1488.69	158.01	<0.0001	CV = 5.69,
	B	74.62	1	74.62	7.92	0.0260	
	A ²	939.68	1	939.68	99.74	<0.0001	R ² = 0.9776,
	B ²	37.82	1	37.82	4.01	0.8520	
	AB	6.76	1	6.76	0.72	0.4250	Adj. R ² =
	Residual	65.95	7	9.42			0.9616,
	Lack of fit	29.78	3	9.93	1.10	0.4469	Adeq precision = 20.488
Color removal	Pure error	36.17	4	9.04			
	Model	4263.92	5	852.78	27949.62	<0.0001	SD = 0.17,
	A	2716.60	1	2716.60	89035.46	<0.0001	
	B	101.27	1	101.27	3319.09	<0.0001	CV = 0.20,
	A ²	1051.68	1	1051.68	34468.39	<0.0001	R ² = 0.9999,
	B ²	22.81	1	22.81	747.49	<0.0001	
	AB	51.12	1	51.12	1675.52	<0.0001	Adj. R ² =
	Residual	0.21	7	0.031			0.9999,
SS removal	Lack of fit	0.15	3	0.051	3.30	0.1395	Adeq precision = 447.580
	Pure error	0.061	4	0.015			
	Model	4276.06	5	855.21	7652.77	<0.0001	SD = 0.33,
	A	2516.17	1	2516.17	22515.71	<0.0001	
	B	33.46	1	33.46	299.46	<0.0001	CV = 0.38,
	A ²	1352.21	1	1352.21	12100.08	<0.0001	R ² = 0.9998,
	B ²	8.33	1	8.33	94.54	<0.0001	
	AB	40.32	1	40.32	360.82	<0.0001	Adj. R ² =
Residual	0.70	7	0.11			0.9997,	
Lack of fit	0.62	3	0.21	5.16	0.0735	Adeq precision = 222.377	
Pure error	0.16	4	0.040				

Abbreviations: ANOVA, analysis of variance; COD, chemical oxygen demand; SS: suspended solids; SD, standard deviation; CV, coefficient of variance; R², the value of correlation coefficient.

Saha et al (28), AP value greater than 4 is adequate and can be used to operate the design space interpreted by the CCD. The corresponding model and the coefficient are considered more significant when *P* is more than F-value (29).

According to Malakahmad and Chuan (8), the low standard deviation shows that the quadratic model is the best and the coefficient of variance (CV) of less than 10% signifies that the model is reproducible. In addition, CV is the ratio of the standard error of estimate to the mean value of the observed response which defines the reproducibility of the model. The values of CV are 5.69, 0.20, and 0.38 for COD, color, and SS, respectively, and they are considered reproducible. The plots of the standardized residual for COD, color, and SS are shown in Figure 2. The normal probability plots help to evaluate the models. The point follows the straight line for each case when the residuals follow a normal distribution, which may describe a normal probability plot. Thus, these experimental data are acceptable. Table 5 presents the final regression model in terms of their coded and actual factors.

Figure 3 illustrates the 3D response surface plots and 2D contour plots of the quadratic model in terms of COD, color, and SS removals, respectively. The purpose was to estimate the correlation relationship between independent variables and the responses of the models. The maximum observed removal of COD was 68.1%, and a complete reduction (100%) was observed in color and SS.

There were 10 solutions given in the RSM optimization process. As shown in Table 6, the solution No. 6 was chosen due to its best performance. To confirm the validity of the statistical experimental strategies, a verification experiment was run at optimum conditions determined based on RSM solutions. The samples were stirred at a constant speed of 250 rpm for 4 minutes. This was followed by slow mixing at 40 rpm for 30 minutes to encourage collisions between destabilization colloidal particles (30) before settlement within 30 minutes. The removal efficiencies were observed as 67.84%, 98.6%, and 99.3% for COD, color, and SS, respectively. This indicates the experimental results were almost identical with the predicted RSM

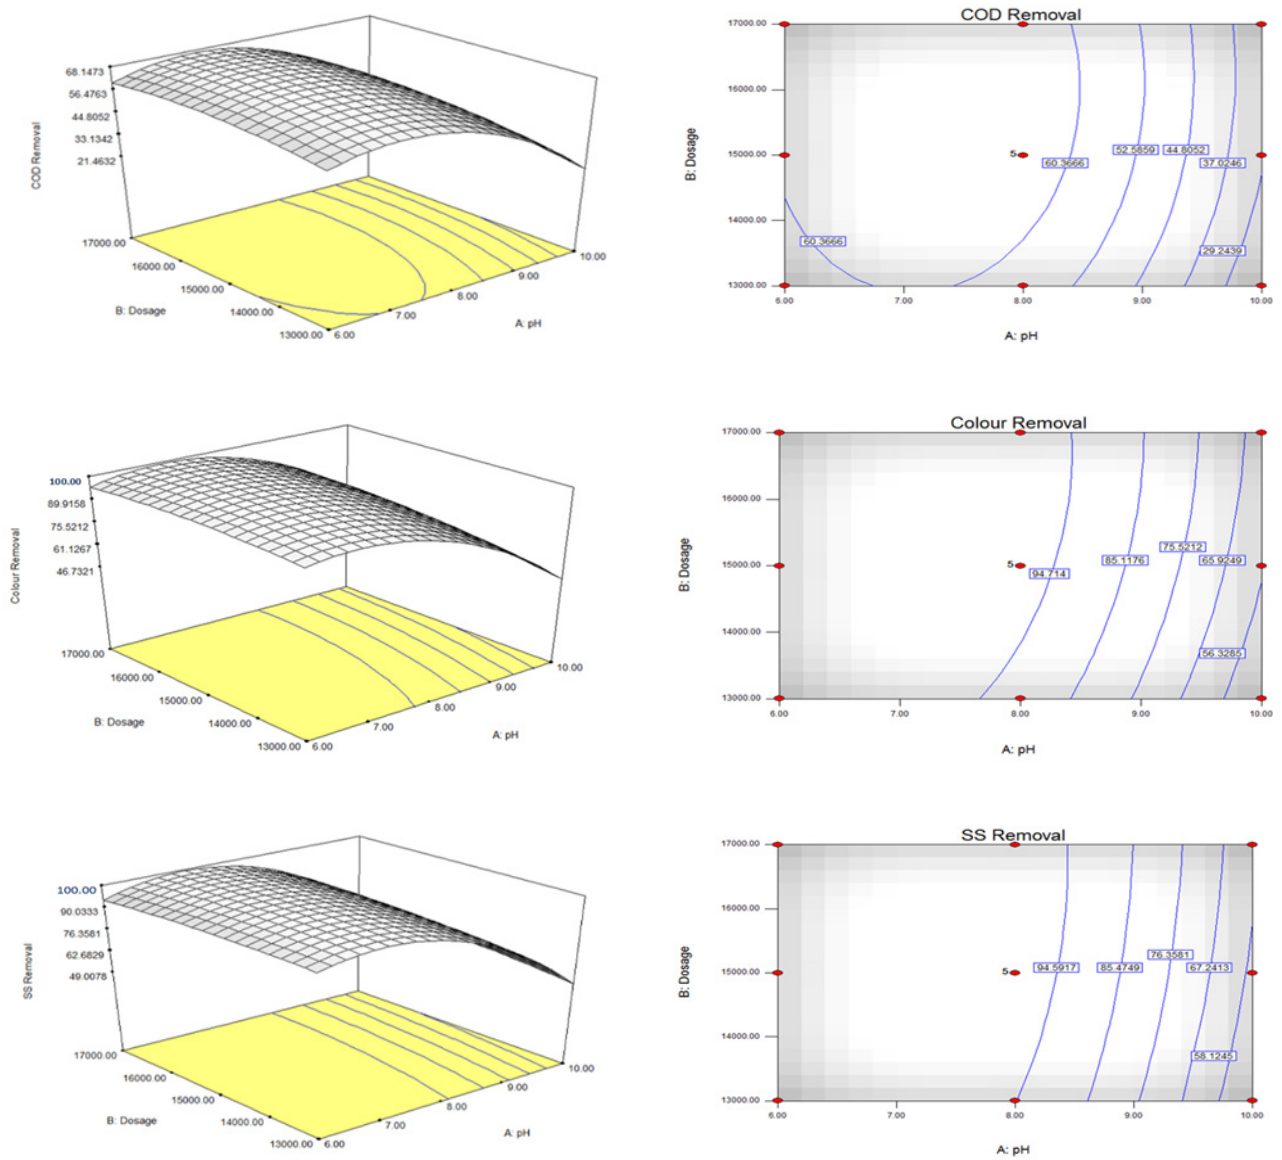


Figure 3. Response Surface and Contour Plots for COD (a), color (b), and SS (c)

Table 5. Final Equations in Terms of Coded and Actual Factors

	Final Equation in Terms of Coded Factors	Final Equation in Terms of Actual Factors
COD removal	$+ 64.19 - 15.75A + 3.53B - 18.45A^2 - 3.70B^2 + 1.30AB$	$-363.52601 + 61.03055A + 0.026916B - 4.61134A^2 - 9.2508E-007B^2 + 3.25000E-004AB$
Color removal	$+ 98.08 - 21.28A + 4.11B - 19.51A^2 - 2.87B^2 + 3.58AB$	$-214.22723 + 54.00907A + 0.016456B - 4.87841A^2 - 7.18405E-007B^2 + 8.9375E-004AB$
SS removal	$+ 98.89 - 20.48A + 2.36B - 22.13A^2 - 1.74B^2 + 3.18AB$	$-193.38128 + 66.36148A + 7.85626E-003B - 5.53168A^2 - 4.3418E-007B^2 + 7.93750E-004AB$

Abbreviations: COD, chemical oxygen demand; SS, suspended solids.

Table 6. Optimization Results According to RSM and the Verified Result Based on Laboratory Experimental

	Solution	Dosage (mg/L)	pH	COD Removal (%)	Color Removal (%)	SS Removal (%)
RSM	No. 6	15,011.60	7.17	67.56	100	100
Lab. experiment	-	15,000	8	67.74	98.57	99.29

Abbreviations: RSM, response surface methodology; COD, chemical oxygen demand; SS, suspended solids.

values, which confirmed that the RSM application was relevant for optimizing the operational condition of the coagulation-flocculation process. Therefore, the optimum value was at a pH of 7.17 and Tin tetrachloride (SnCl_4) dosage of 15,012 mg/L. The results are in agreement with those of the study conducted by Ghafari et al (13), in which the RSM was applied to optimize the coagulation-flocculation treatment of leachate using poly-aluminum chloride and alum. They concluded that the data and model predictions agreed well where COD, turbidity, color, and TSS removal efficiencies of 43.1%, 94.0%, 90.7%, and 92.2% were demonstrated for polyaluminium chloride, as well as 62.8%, 88.4%, 86.4%, and 90.1% for alum. In another study, Bashir et al (31) used RSM to optimize the treatment of stabilized sanitary landfill leachate using the anionic resin. Based on their results, the color, COD, SS, and turbidity removal efficiencies of 91.5%, 70.3%, 93.1%, and 92.4% were experimentally attained and were found to fit well with the prediction model. Accordingly, the RSM is considered as a good tool for the optimization of landfill leachate using different treatment methods.

4. Conclusion

The present study investigated the applicability of the RSM tool in order to observe the removal efficiency of COD, color, and SS using SnCl_4 as a coagulant in the coagulant-flocculation process. The optimum pH was 7.17 for SnCl_4 with an optimum dosage of 15012 mg/L. The results revealed that the SnCl_4 was capable of removing all color and SS from the landfill leachate while it only removed 67.6% of the COD. In addition, the RSM results were compared with the experimental data and both results were consistent where the obtained COD, color, and SS removals were 67.84%, 98.6%, and 99.3%, respectively. Overall, the results of this study demonstrated that the RSM application was appropriate for optimizing the operational condition of the coagulation-flocculation process.

Conflict of Interest Disclosures

The authors declare that they have no conflict of interests.

Acknowledgement

This work was funded by Universiti Sains Malaysia under RUI Grant Scheme (Grant No. 1001/PAWAM/8014081) and RU bridging grant (304/PAWAM/6316096) for research associated with the Solid Waste Management Cluster, Engineering Campus, Universiti Sains Malaysia.

References

- Adhikari B, Khanal SN. Qualitative study of landfill leachate from different ages of landfill sites of various countries including Nepal. *IOSR J Environ Sci Toxicol Food Technol*. 2015;9(1):23-36. doi: [10.9790/2402-09132336](https://doi.org/10.9790/2402-09132336).
- Aziz SQ, Aziz HA, Yusoff MS, Bashir MJ, Umar M. Leachate characterization in semi-aerobic and anaerobic sanitary landfills: a comparative study. *J Environ Manage*. 2010;91(12):2608-14. doi: [10.1016/j.jenvman.2010.07.042](https://doi.org/10.1016/j.jenvman.2010.07.042).
- Zainol NA, Aziz HA, Yusoff MS, Umar M. The use of polyaluminum chloride for the treatment of landfill leachate via coagulation and flocculation processes. *Res J Chem Sci*. 2011;1(3):34-9.
- Bratby J. Coagulation and flocculation in water and wastewater treatment. IWA Publishing; 2016.
- Altaher H, ElQada E, Omar W. Pretreatment of wastewater streams from petroleum/petrochemical industries using coagulation. *Advances in Chemical Engineering and Science*. 2011;1(4):245-51. doi: [10.4236/aces.2011.14035](https://doi.org/10.4236/aces.2011.14035).
- Dawood A, Li Y. Modeling and optimization of new flocculant dosage and pH for flocculation: removal of pollutants from wastewater. *Water*. 2013;5(2):342-55. doi: [10.3390/w5020342](https://doi.org/10.3390/w5020342).
- Usefi S, Asadi-Ghalhari M. Modeling and Optimization of the Coagulation-Flocculation Process in Turbidity Removal from Aqueous Solutions Using Rice Starch. *Pollution*. 2019;5(3):623-36. doi: [10.22059/poll.2019.271649.552](https://doi.org/10.22059/poll.2019.271649.552).
- Malakahmad A, Chuan SY. Application of response surface methodology to optimize coagulation-flocculation treatment of anaerobically digested palm oil mill effluent using alum. *Desalin Water Treat*. 2013;51(34-36):6729-35. doi: [10.1080/19443994.2013.791778](https://doi.org/10.1080/19443994.2013.791778).
- Carley KM, Kamneva NY, Reminga J. Response surface methodology: CASOS technical report. Center for Computational Analysis of Social and Organizational Systems, Carnegie Mellon University; 2004.
- Bezerra MA, Santelli RE, Oliveira EP, Villar LS, Escalera LA. Response surface methodology (RSM) as a tool for optimization in analytical chemistry. *Talanta*. 2008;76(5):965-77. doi: [10.1016/j.talanta.2008.05.019](https://doi.org/10.1016/j.talanta.2008.05.019).
- Mosaddeghi MR, Pajoum Shariati F, Vaziri Yazdi SA, Nabi Bidhendi G. Application of response surface methodology (RSM) for optimizing coagulation process of paper recycling wastewater using *Ocimum basilicum*. *Environ Technol*. 2018;1-9. doi: [10.1080/09593330.2018.1491637](https://doi.org/10.1080/09593330.2018.1491637).
- Abu Amr SS, Aziz HA, Bashir MJ. Application of response surface methodology (RSM) for optimization of semi-aerobic landfill leachate treatment using ozone. *Appl Water Sci*. 2014;4(3):231-9. doi: [10.1007/s13201-014-0156-z](https://doi.org/10.1007/s13201-014-0156-z).
- Ghafari S, Aziz HA, Isa MH, Zinatizadeh AA. Application of response surface methodology (RSM) to optimize coagulation-flocculation treatment of leachate using poly-aluminum chloride (PAC) and alum. *J Hazard Mater*. 2009;163(2-3):650-6. doi: [10.1016/j.jhazmat.2008.07.090](https://doi.org/10.1016/j.jhazmat.2008.07.090).
- Farajnezhad H, Gharbani P. Coagulation treatment of wastewater in petroleum industry using poly aluminum chloride and ferric chloride. *International Journal of Research and Reviews in Applied Sciences*. 2012;13(1):306-10
- Lee CS, Robinson J, Chong MF. A review on application of flocculants in wastewater treatment. *Process Saf Environ Prot*. 2014;92(6):489-508. doi: [10.1016/j.psep.2014.04.010](https://doi.org/10.1016/j.psep.2014.04.010).
- Rusdizal N, Aziz HA, Fatehah MO. Potential use of polyaluminium chloride and tobacco leaf as coagulant and coagulant aid in post-treatment of landfill leachate. *Avicenna J Environ Health Eng*. 2015;2(2):e5836. doi: [10.17795/ajehe-5836](https://doi.org/10.17795/ajehe-5836).
- Kamaruddin MA, Abdullah MMA, Yusoff MS, Alrozi R, Neculai O. Coagulation-flocculation process in landfill leachate treatment: focus on coagulants and coagulants aid. *IOP Conf Ser Mater Sci Eng*. 2017;209(1):012083. doi: [10.1088/1757-899x/209/1/012083](https://doi.org/10.1088/1757-899x/209/1/012083).
- Aziz HA, Rosli MY, Abu Amr SS, Hussain S. Potential use of

- Titanium Tetrachloride as Coagulant to Treat Semi Aerobic Leachate Treatment. *Aust J Basic Appl Sci.* 2015;9(94):37-44.
19. Hussain S, van Leeuwen J, Chow CWK, Aryal R, Beecham S, Duan J, et al. Comparison of the coagulation performance of tetravalent titanium and zirconium salts with alum. *Chem Eng J.* 2014;254:635-46. doi: [10.1016/j.cej.2014.06.014](https://doi.org/10.1016/j.cej.2014.06.014).
 20. Pushpalatha TN, Lokeshappa B. The Use of Alum, Ferric Chloride and Titanium tetrachloride as Coagulants in Treating Landfill Leachate. *International Journal of Science, Engineering and Technology Research (IJSETR).* 2015;4(6):2093-2096.
 21. Galloux J, Chekli L, Phuntsho S, Tijing LD, Jeong S, Zhao YX, et al. Coagulation performance and floc characteristics of polytitanium tetrachloride and titanium tetrachloride compared with ferric chloride for coal mining wastewater treatment. *Sep Purif Technol.* 2015;152:94-100. doi: [10.1016/j.seppur.2015.08.009](https://doi.org/10.1016/j.seppur.2015.08.009).
 22. Engelhardt TL. *Coagulation, Flocculation and Clarification of Drinking Water.* Loveland, Colorado: Hach Company; 2014.
 23. Zawawi MH. *Shallow groundwater contamination study at landfill sites using integrated geophysical hydrochemistry and isotope hydrology techniques [Thesis].* Malaysia: Universiti Sains Malaysia; 2014.
 24. Syafalni S, Zawawi MH, Abustan I. Isotopic and hydrochemistry fingerprinting of leachate migration in shallow groundwater at controlled and uncontrolled landfill sites. *World Appl Sci J.* 2014;31(6):1198-206. doi: [10.5829/idosi.wasj.2014.31.06.217](https://doi.org/10.5829/idosi.wasj.2014.31.06.217).
 25. American Public Health Association (APHA). *Standard Methods for the Examination of Water and Wastewater.* 21th ed. Washington, DC: APHA; 2005.
 26. Bhalla B, Saini MS, Jha MK. Effect of age and seasonal variations on leachate characteristics of municipal solid waste landfill. *Int J Res Eng Technol.* 2013;2(8):223-32. doi: [10.15623/ijret.2013.0208037](https://doi.org/10.15623/ijret.2013.0208037).
 27. Talebi A, Teng TT, Alkarkhi AFM, Norli I, Low LW. Optimization of nickel removal using liquid-liquid extraction and response surface methodology. *Desalin Water Treat.* 2012;47(1-3):334-40. doi: [10.1080/19443994.2012.696432](https://doi.org/10.1080/19443994.2012.696432).
 28. Saha PD, Dey A, Marik P. Batch removal of chromium (VI) from aqueous solutions using wheat shell as adsorbent: process optimization using response surface methodology. *Desalin Water Treat.* 2012;39(1-3):95-102. doi: [10.1080/19443994.2012.669164](https://doi.org/10.1080/19443994.2012.669164).
 29. Trinh TK, Kang LS. Response surface methodological approach to optimize the coagulation-flocculation process in drinking water treatment. *Chem Eng Res Des.* 2011;89(7):1126-35. doi: [10.1016/j.cherd.2010.12.004](https://doi.org/10.1016/j.cherd.2010.12.004).
 30. Taşdemir T, Taşdemir A. Effect of mixing conditions on flocculation. In *Proceedings of XIIIth International Mineral Processing Symposium*; 2012. p. 831-7.
 31. Bashir MJK, Aziz HA, Yusoff MS, Aziz SQ, Mohajeri S. Stabilized sanitary landfill leachate treatment using anionic resin: Treatment optimization by response surface methodology. *J Hazard Mater.* 2010;182(1):115-22. doi: [10.1016/j.jhazmat.2010.06.005](https://doi.org/10.1016/j.jhazmat.2010.06.005).